




When the pumpage is corrosive...

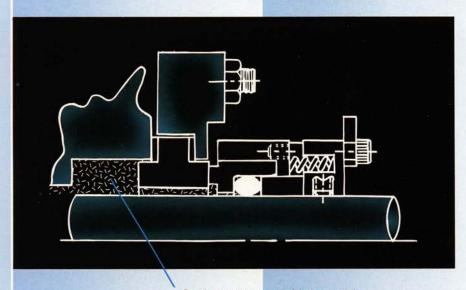

Product contacts only inert materials.

Inside mounted seals, manufactured from metal, could disintegrate over time.

The Flex-A-Seal Style 23 solves the corrosion problem by only exposing compatible and/or inert material to the pumpage.

State-of-the-Art Engineering

- Pre-assembled at factory— No dimensions to take. Just slide on shaft, tighten collar, and remove setting clips.
- Hydraulically balanced— Factory engineered to handle internal pressure up to 150 PSI.
- Readily accessible—Seal faces visible—Seal is mounted outside the stuffing box and is completely visible and able to be modified without pulling pump down.

Highest Quality Materials

- High strength rotating face—Carbon is shrouded in metal for extra compression strength, thus minimizing possibility of breakage.
- Adaptable to teflon or plastic sleeves—Optional split metal collar under set screws allows installation with no damage to softer materials.

Best Value

- Low cost—No exotic metallurgy required so that the seal can be supplied at a reasonable cost.
- Field repairable—Pump can be put back in service with minimum spare parts and down time.
- Off the shelf—Sizes from 3/4" to 4½" can be delivered as quickly as you require.
- Low cost repair kits— Repair a seal at a fraction of the original price.

1-800-426-3594
On-line Solutions
and Service



(802) 878-8307 FAX (802) 878-2479 1 JACKSON ST. P.O. BOX 184 ESSEX JCT., VT 05453-0184